

12WRS400

LOW FREQUENCY TRANSDUCER
WRS Series

KEY FEATURES

- High power handling: 800 W program power
- 3" copper wire voice coil
- High sensitivity: 97 dB (1W / 1m)
- · Optimized pressed steel frame

- FEA optimized ceramic magnetic circuit
- Weatherproof cone treatment for both sides of the cone
- · Low harmonic distortion and linear response
- Wide range of applications of low and mid-low frequencies





TECHNICAL SPECIFICATIONS

Nominal diameter	300 mm	12 in
Rated impedance		8 Ω
Minimum impedance		7 Ω
Power capacity ¹		400 W _{AES}
Program power ²		800 W
Sensitivity	97 dB 1W	/ 1m @ Z _N
Frequency range	45	- 5.000 Hz
Recom. enclosure vol.	30 / 100 I 1,	06 / 3,53 ft ³
Voice coil diameter	76,2 mm	3 in
BI factor		17,4 N/A
Moving mass		0,063 kg
Voice coil length		16 mm
Air gap height		8 mm
X _{damage} (peak to peak)		30 mm

THIELE-SMALL PARAMETERS³

42 Hz
5,6 Ω
7,7
0,31
0,29
91 I
228 μm / N
2,2 kg / s
2,1 %
$0,053 \text{ m}^2$
6,3 mm
334 cm ³
1,3 mH

Notes

¹ The power capaticty is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.


³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

 $^{^4}$ The X_{max} is calculated as $(L_{vc} - H_{aq})/2 + (H_{aq}/3,5)$, where L_{vc} is the voice coil length and H_{aq} is the air gap height.



12WRS400

LOW FREQUENCY TRANSDUCER WRS Series

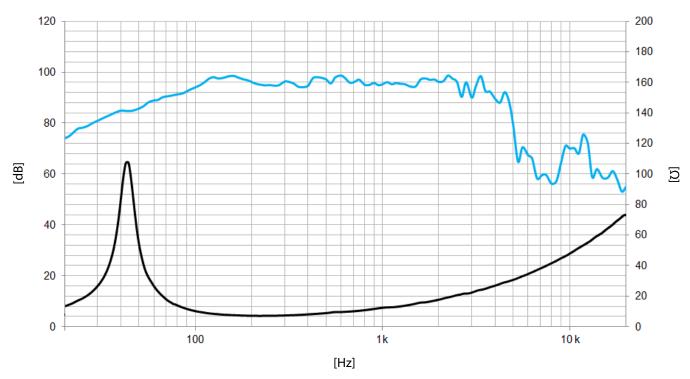

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION

Overall diameter	310 mm	12,2 in
Bolt circle diameter	292 mm	11,5 in
Baffle cutout diameter:		
- Front mount	280 mm	11,0 in
Depth	131 mm	5,2 in
Net weight	5,5 kg	12,1 lb
Shipping weight	6 kg	13,2 lb

DIMENSION DRAWING

