

**5P200Fe** 

**LOW & MID FREQUENCY TRANSDUCER** 

**P200 Series** 

## **KEY FEATURES**

- Program power: 300 W
- Sensitivity: 92 dB (1W / 1m)
- FEA optimized ferrite magnetic circuit
- Weatherproof paper cone and Santoprene<sup>™</sup> surround



- Shorting cap for extended response and low harmonic distortion
- Extended controlled displacement: Xmax ± 5,7 mm
- 16 mm peak-to-peak excursion before damage



## TECHNICAL SPECIFICATIONS

Nominal diameter	125 mm	5 in
Rated impedance		8Ω
Minimum impedance		6,7 Ω
Power capacity*	150 W <sub>AES</sub>	
Program power	300 W	
Sensitivity	92 dB 1W / 1m	@ Z <sub>N</sub>
Frequency range	70 - 10.0	00 Hz
Recom. enclosure. vol.	4 / 10   0,14 / 0	),35 ft³
Voice coil diameter	38,1 mm 1,5 in	
BI factor	8	,5 N/A
Moving mass	0,0	)10 kg
Voice coil length	1	4 mm
Air gap height		6 mm
X <sub>damage</sub> (peak to peak)	1	6 mm

## THIELE-SMALL PARAMETERS\*\*

Resonant frequency, f <sub>s</sub>	72 Hz
D.C. Voice coil resistance, Re	5,2 Ω
Mechanical Quality Factor, Q <sub>ms</sub>	7,5
Electrical Quality Factor, Q <sub>es</sub>	0,35
Total Quality Factor, Q <sub>ts</sub>	0,33
Equivalent Air Volume to C <sub>ms</sub> , V <sub>as</sub>	5,7 I
Mechanical Compliance, C <sub>ms</sub>	451 μm / N
Mechanical Resistance, R <sub>ms</sub>	0,65 kg / s
Efficiency, η <sub>0</sub>	0,6 %
Effective Surface Area, S <sub>d</sub>	0,0095 m <sup>2</sup>
Maximum Displacement, X <sub>max</sub> ***	5,7 mm
Displacement Volume, V <sub>d</sub>	49 cm <sup>3</sup>
Voice Coil Inductance, L <sub>e</sub> @ 1 kHz	0,6 mH

\* The power capaticity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

\*\* T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

\*\*\* The  $X_{max}$  is calculated as  $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$ , where  $L_{vc}$  is the voice coil length and  $H_{ag}$  is the air gap height.


Notes



5P200Fe

**LOW & MID FREQUENCY TRANSDUCER** 

**P200 Series** 

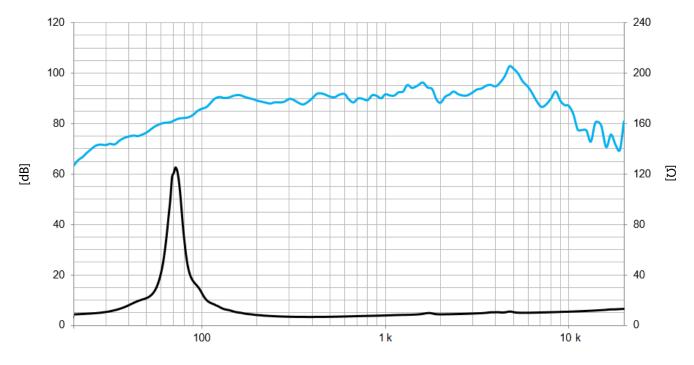

[Hz]

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION			
Overall diameter	155 mm	6,1 in	
Bolt circle diameter	141,5 mm	5,6 in	
Baffle cutout diameter:			
- Front mount	120 mm	4,7 in	
Depth	80 mm	3,1 in	
Volume displaced by driver	0,5 I	0,02 ft <sup>3</sup>	
Net weight	2,2 kg	4,8 lb	
Shipping weight	2,3 kg	5,1 lb	

## **DIMENSION DRAWING**

