

### KEY FEATURES

- High power handling: 500 W program power
- 2" copper wire voice coil
- High sensitivity: 95 dB (1W / 1m)
- FEA optimized ceramic magnetic circuit
- Designed with MMSS technology
- Low harmonic distortion and linear response
- Waterproof cone with treatment on both sides of the cone
- Aluminium frame
- Extended controlled displacement:  $X_{\max} \pm 6$  mm
- 32 mm peak-to-peak excursion before damage
- Wide range of applications of low and mid-low frequencies



### TECHNICAL SPECIFICATIONS

Nominal diameter	200 mm	8 in
Rated impedance		8 $\Omega$
Minimum impedance		7,6 $\Omega$
Power capacity*	250 W <sub>AES</sub>	
Program power	500 W	
Sensitivity	95 dB	1W / 1m @ Z <sub>N</sub>
Frequency range	65 - 4.000 Hz	
Voice coil diameter	50,8 mm	2 in
Bl factor	15,1 N/A	
Moving mass	0,026 kg	
Voice coil length	15 mm	
Air gap height	8 mm	
X <sub>damage</sub> (peak to peak)	32 mm	

### THIELE-SMALL PARAMETERS\*\*


Resonant frequency, f <sub>s</sub>	62 Hz
D.C. Voice coil resistance, R <sub>e</sub>	5,9 $\Omega$
Mechanical Quality Factor, Q <sub>ms</sub>	2,4
Electrical Quality Factor, Q <sub>es</sub>	0,26
Total Quality Factor, Q <sub>ts</sub>	0,24
Equivalent Air Volume to C <sub>ms</sub> , V <sub>as</sub>	17,7 l
Mechanical Compliance, C <sub>ms</sub>	251 $\mu$ m / N
Mechanical Resistance, R <sub>ms</sub>	4,2 kg / s
Efficiency, $\eta_0$	1,5 %
Effective Surface Area, S <sub>d</sub>	0,022 m <sup>2</sup>
Maximum Displacement, X <sub>max</sub> ***	6 mm
Displacement Volume, V <sub>d</sub>	132 cm <sup>3</sup>
Voice Coil Inductance, L <sub>e</sub> @ 1 kHz	0,9 mH

Notes:

\* The power capacity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

\*\* T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

\*\*\* The X<sub>max</sub> is calculated as (L<sub>vc</sub> - H<sub>ag</sub>)/2 + (H<sub>ag</sub>/3,5), where L<sub>vc</sub> is the voice coil length and H<sub>ag</sub> is the air gap height.

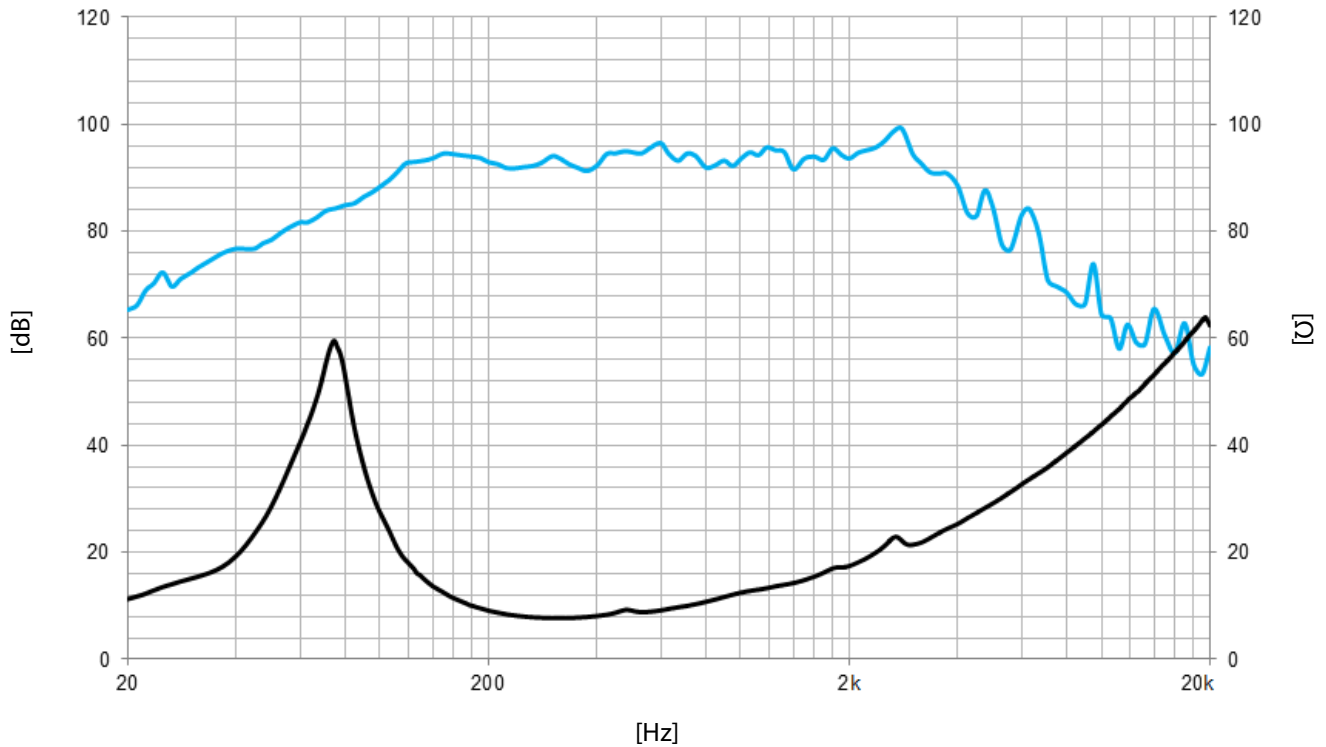

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

### MOUNTING INFORMATION

Overall diameter	212 mm	8,35 in
Bolt circle diameter	197,5 mm	7,78 in
Baffle cutout diameter:		
- Front mount	182 mm	7,17 in
Depth	95 mm	3,74 in
Net weight	3,3 kg	7,3 lb
Shipping weight	3,6 kg	7,9 lb

### DIMENSION DRAWING

