

KEY FEATURES

- High power handling: 800 W program power
- 3" copper wire voice coil
- High sensitivity: 97 dB (1W / 1m)
- FEA optimized ceramic magnetic circuit
- Waterproof cone treatment for both sides of the cone
- Extended controlled displacement: $X_{\max} \pm 6,3$ mm
- 30 mm peak-to-peak excursion before damage
- Low harmonic distortion and linear response
- Wide range of applications of low and mid-low frequencies



TECHNICAL SPECIFICATIONS

Nominal diameter	300 mm	12 in
Rated impedance		8 Ω
Minimum impedance		6,5 Ω
Power capacity ¹		400 W _{AES}
Program power ²		800 W
Sensitivity	97 dB	1W / 1m @ Z _N
Frequency range		45 - 5.000 Hz
Recom. enclosure vol.	30 / 100 l	1 / 3,5 ft ³
Voice coil diameter	76,2 mm	3 in
Bl factor		18 N/A
Moving mass		0,062 kg
Voice coil length		16 mm
Air gap height		8 mm
X _{damage} (peak to peak)		30 mm

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.


² Program power is defined as power capacity + 3 dB.

³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

⁴ The X_{max} is calculated as $(L_{vc} - H_{ag})/2 + (H_{ag}/3,5)$, where L_{vc} is the voice coil length and H_{ag} is the air gap height.

THIELE-SMALL PARAMETERS³

Resonant frequency, f _s	42 Hz
D.C. Voice coil resistance, R _e	5,8 Ω
Mechanical Quality Factor, Q _{ms}	5,6
Electrical Quality Factor, Q _{es}	0,30
Total Quality Factor, Q _{ts}	0,28
Equivalent Air Volume to C _{ms} , V _{as}	91,1 l
Mechanical Compliance, C _{ms}	229 μ m / N
Mechanical Resistance, R _{ms}	2,9 kg / s
Efficiency, η_0	2,2 %
Effective Surface Area, S _d	0,053 m ²
Maximum Displacement, X _{max} ⁴	6,3 mm
Displacement Volume, V _d	334 cm ³
Voice Coil Inductance, L _e	1 mH

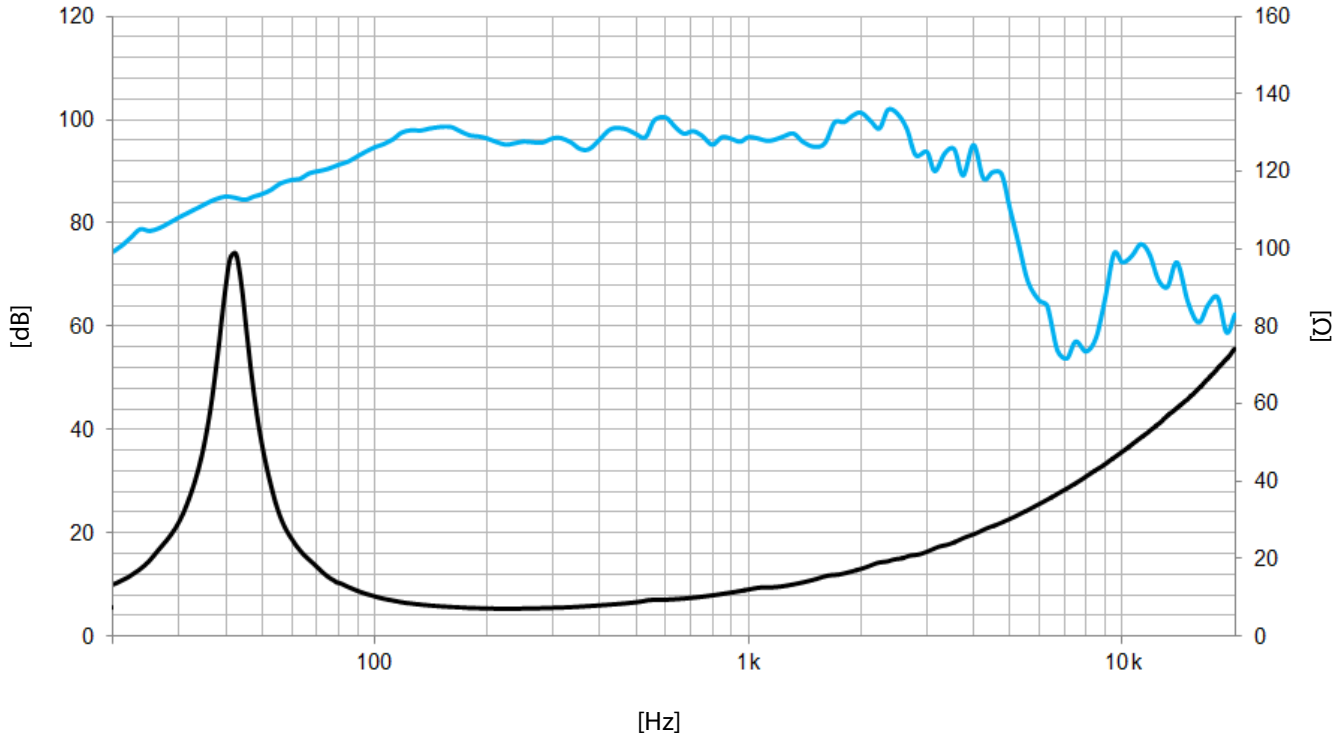

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

MOUNTING INFORMATION

Overall diameter	312 mm	12,3 in
Bolt circle diameter	294,5 mm	11,6 in
Baffle cutout diameter:		
- Front mount	278 mm	10,9 in
Depth	131 mm	5,2 in
Net weight	5,5 kg	12,1 lb
Shipping weight	6 kg	13,2 lb

DIMENSION DRAWING

