beyma

Enclosure
LA210

www.beyma.com

beyma

Enclosure
LA210

Line Array Enclosure

- x1 of **CD2514ND** (Compression Driver)
- x1 of **SG10** (Line Array Waveguide)
- x2 of **10MC500ND** (Low Frequency Transducer)

Line Array Enclosure

Frequency Response (+/-3dB)	105Hz-18KHz
Usable Bandwidth (-10dB)	90Hz-20KHz
Maximum SPL(*)	140dB
Sensitivity 1W@1m	104dB
HxV Coverage angle (-6dB)	90°x10°
Transducers LF	2X10MC500ND
Transducers HF	CD-2514Nd/Ti
AES Power Handling	1000W
Nominal impedance	8Ω
Connectors	2xNL4
Box dimmensions (**)	700 x 300 x 455

(*) Peak level at 1m under free field conditions using pink noise with a 6gB crest factor.

(**) All dimensions in millimeters.

FREQUENCY RESPONSE

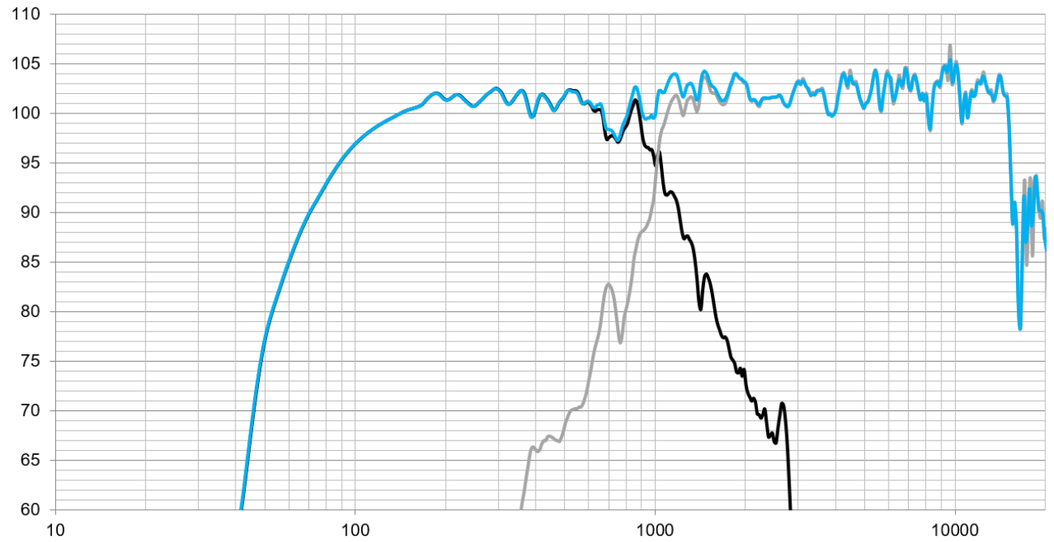

IMPEDANCE

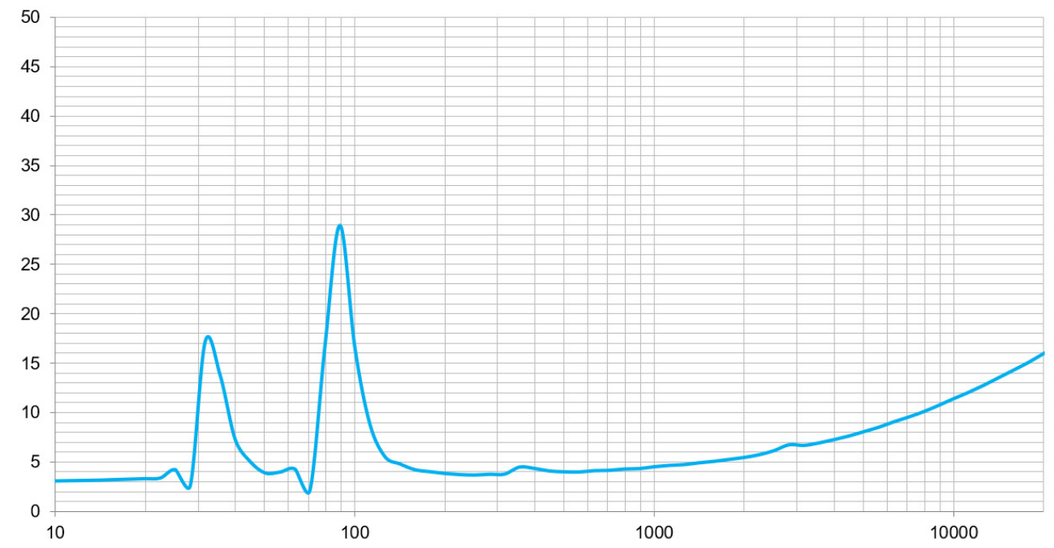

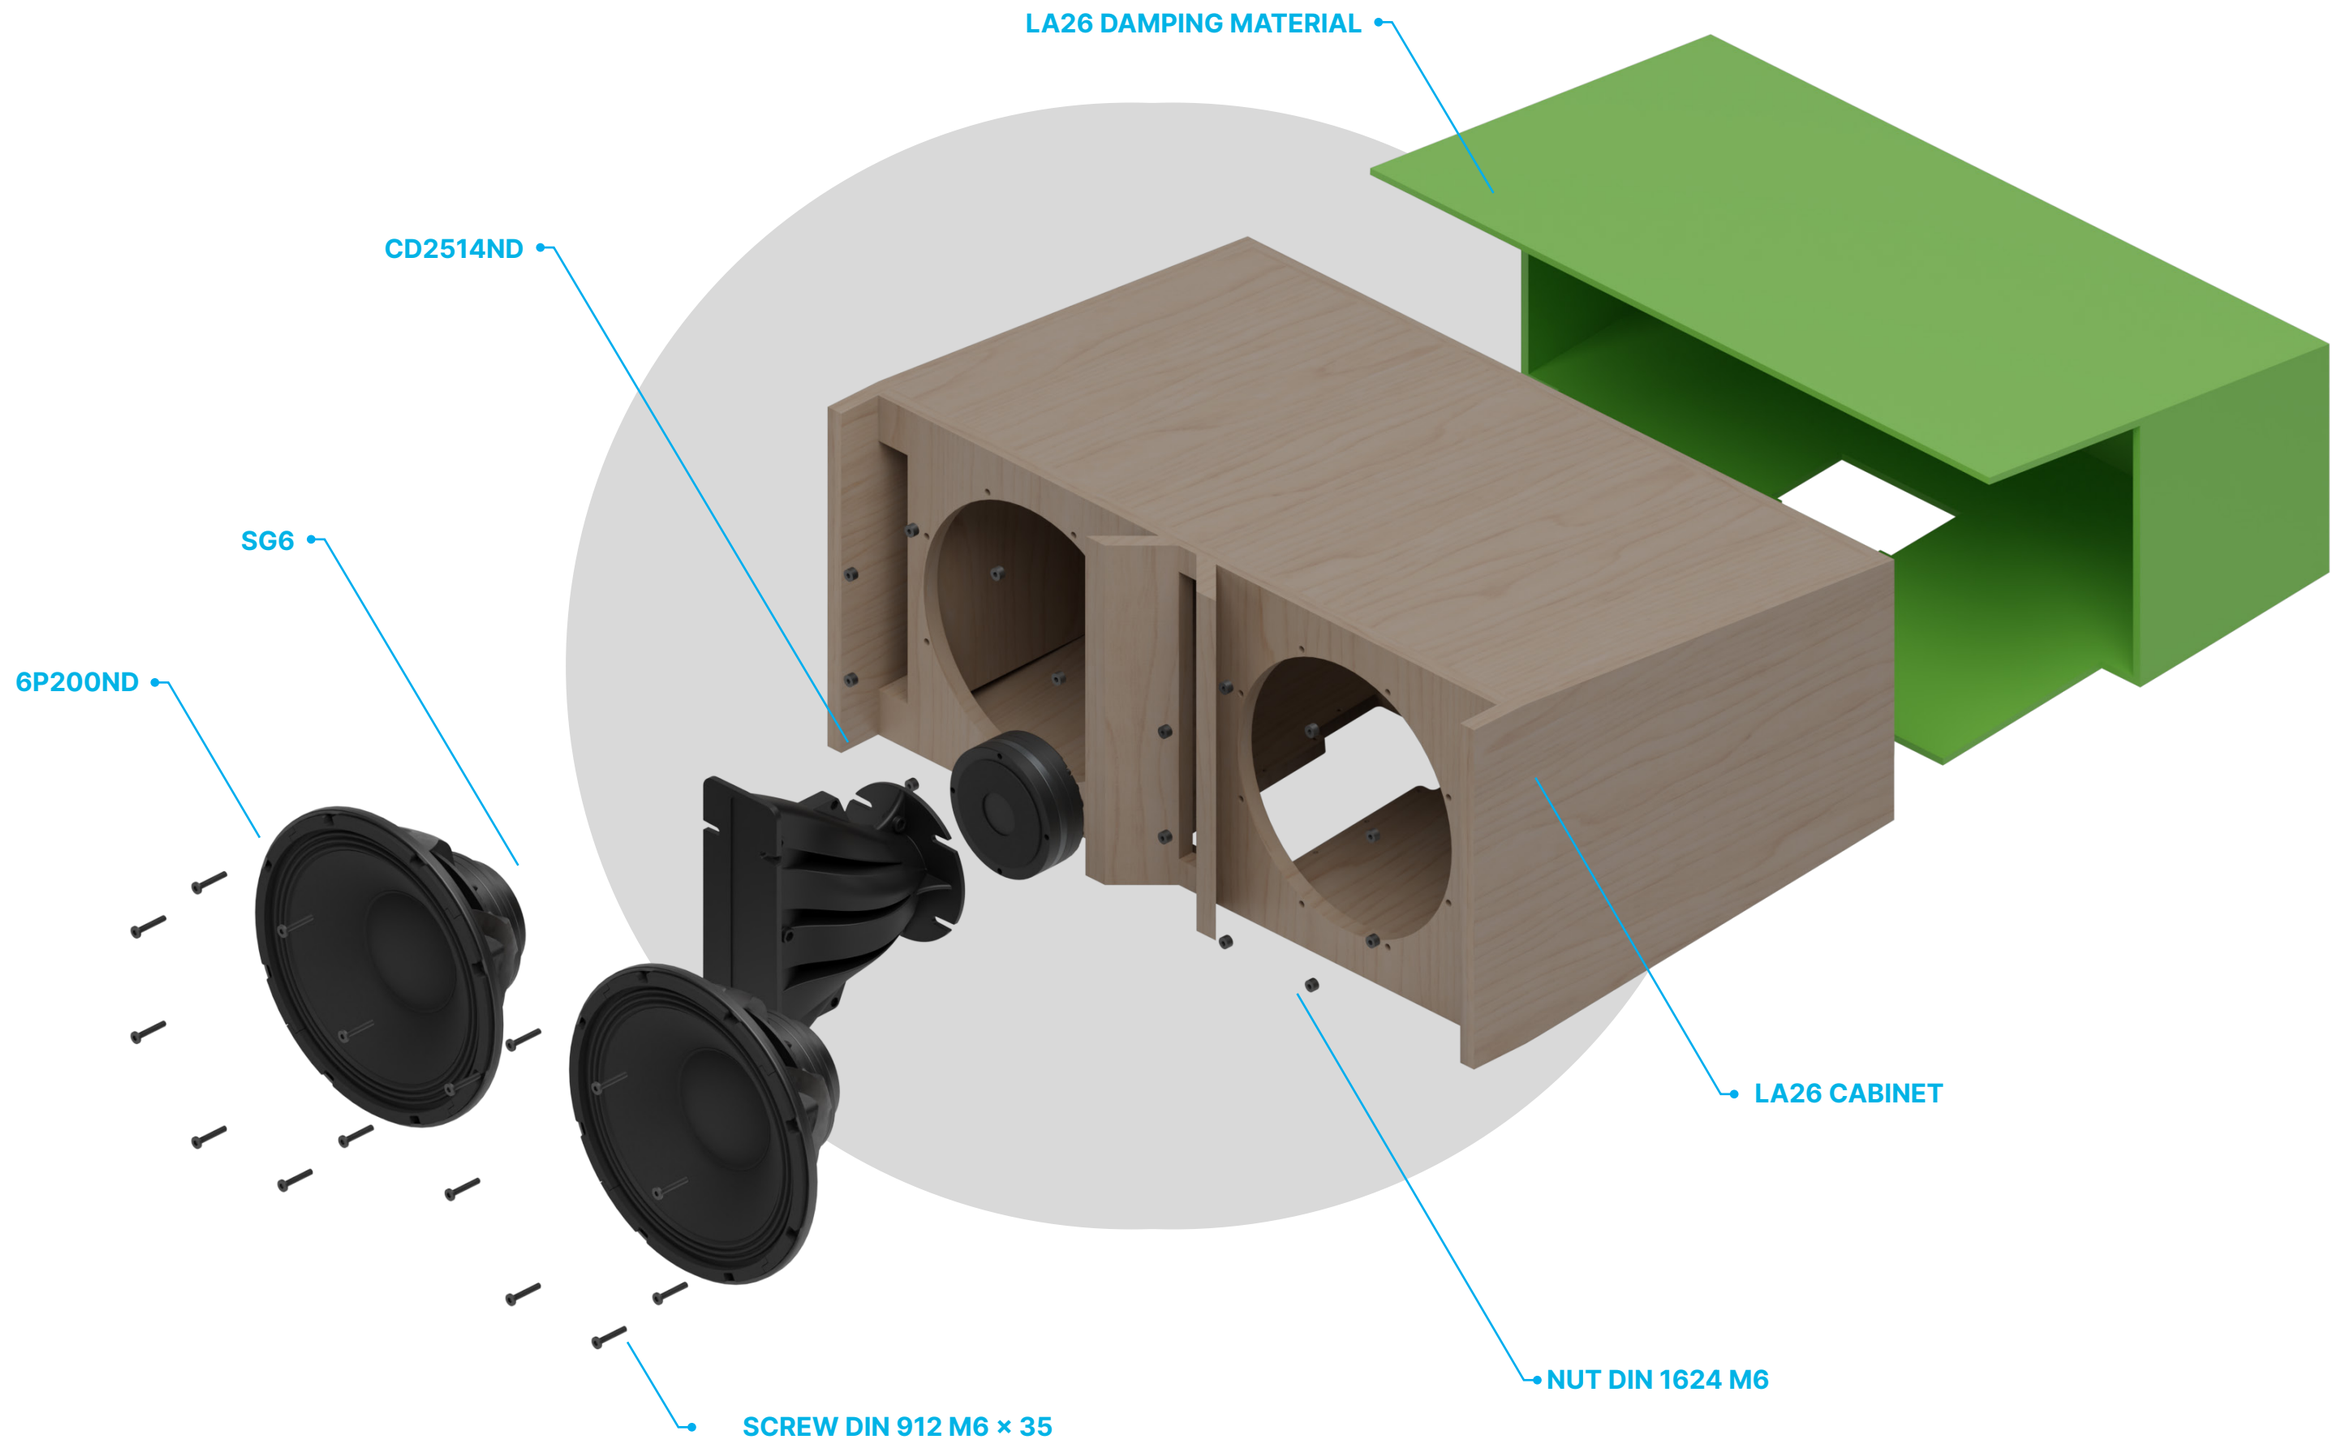
LA26 DAMPING MATERIAL
CD2514ND
SG6
6P200ND
LA26 CABINET
NUT DIN 1624 M6
SCREW DIN 912 M6 × 35

Reference Design
Cabinet

Line Array Enclosure

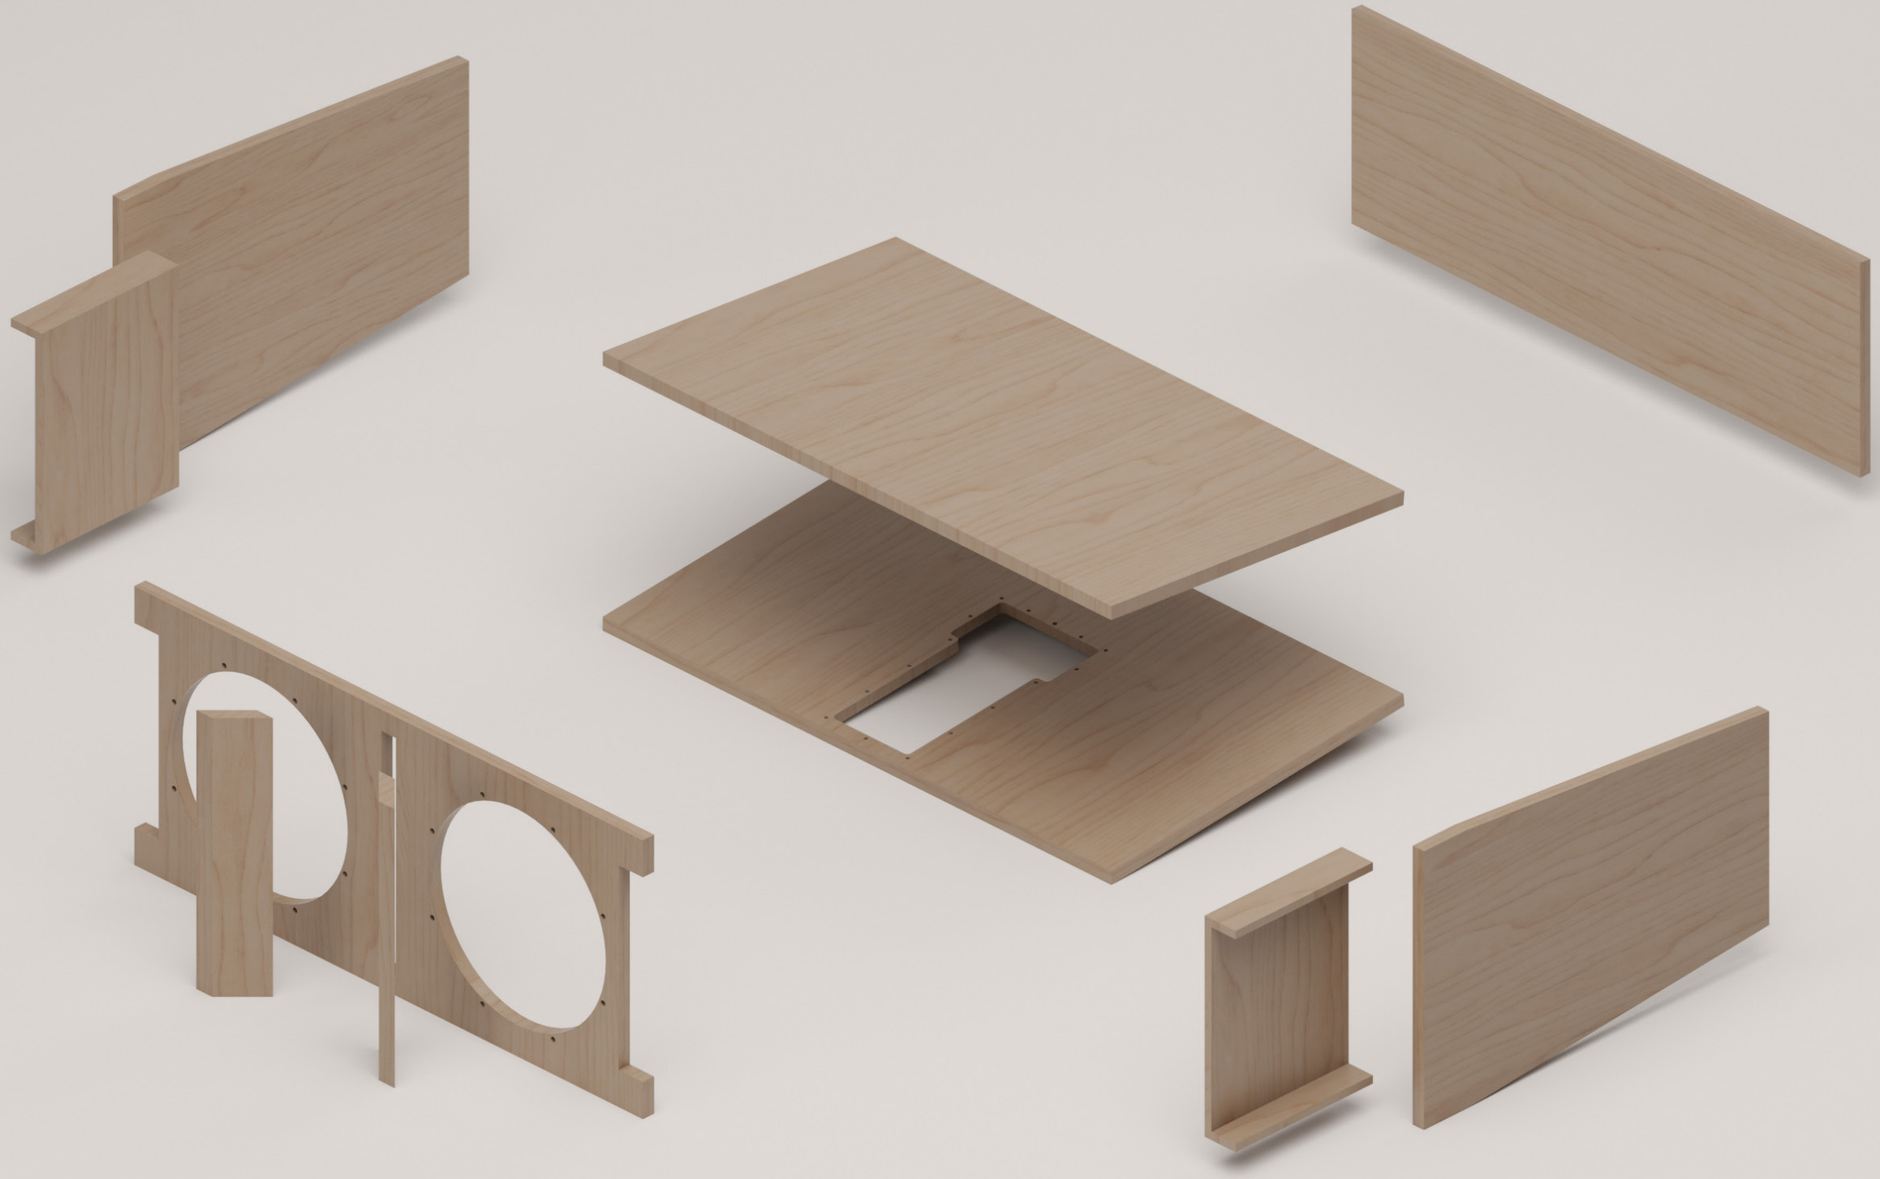

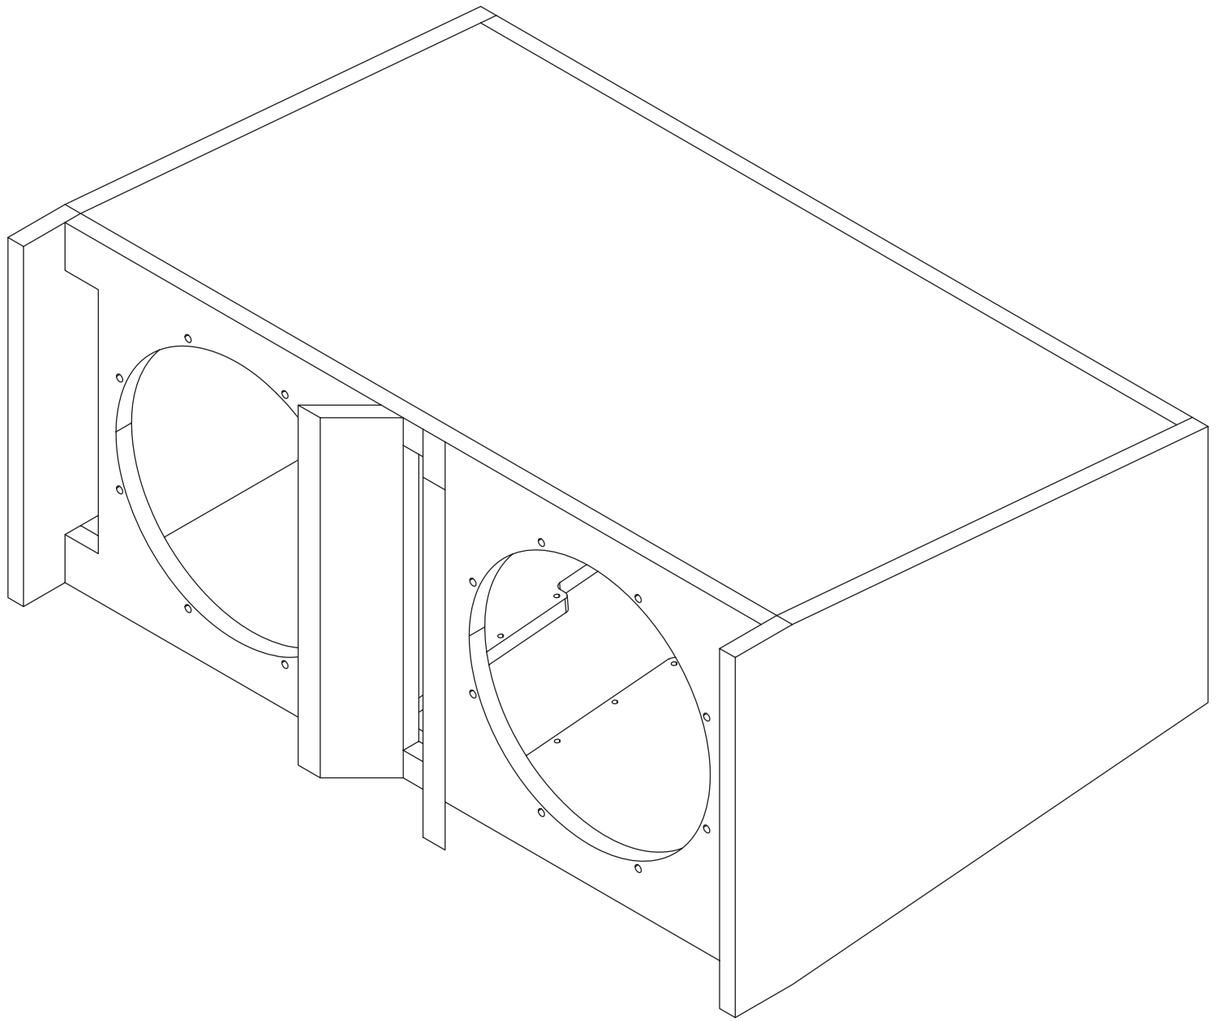

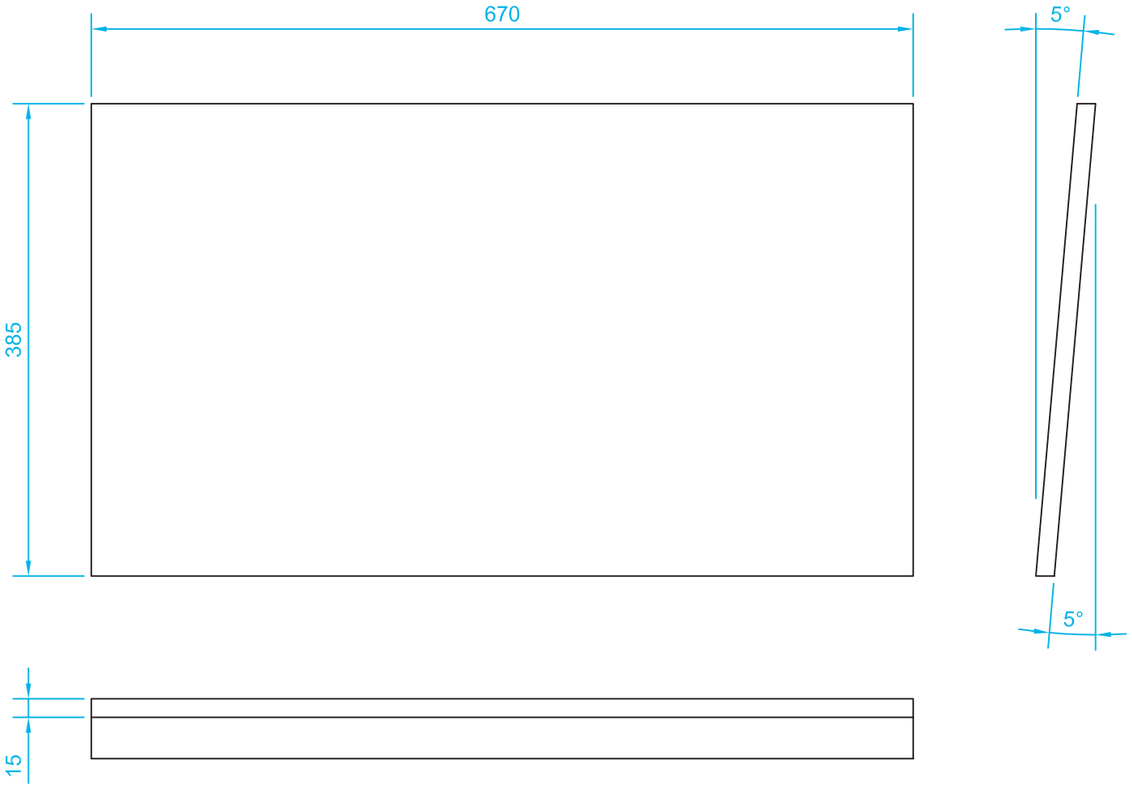
670
385
15
5°
5°

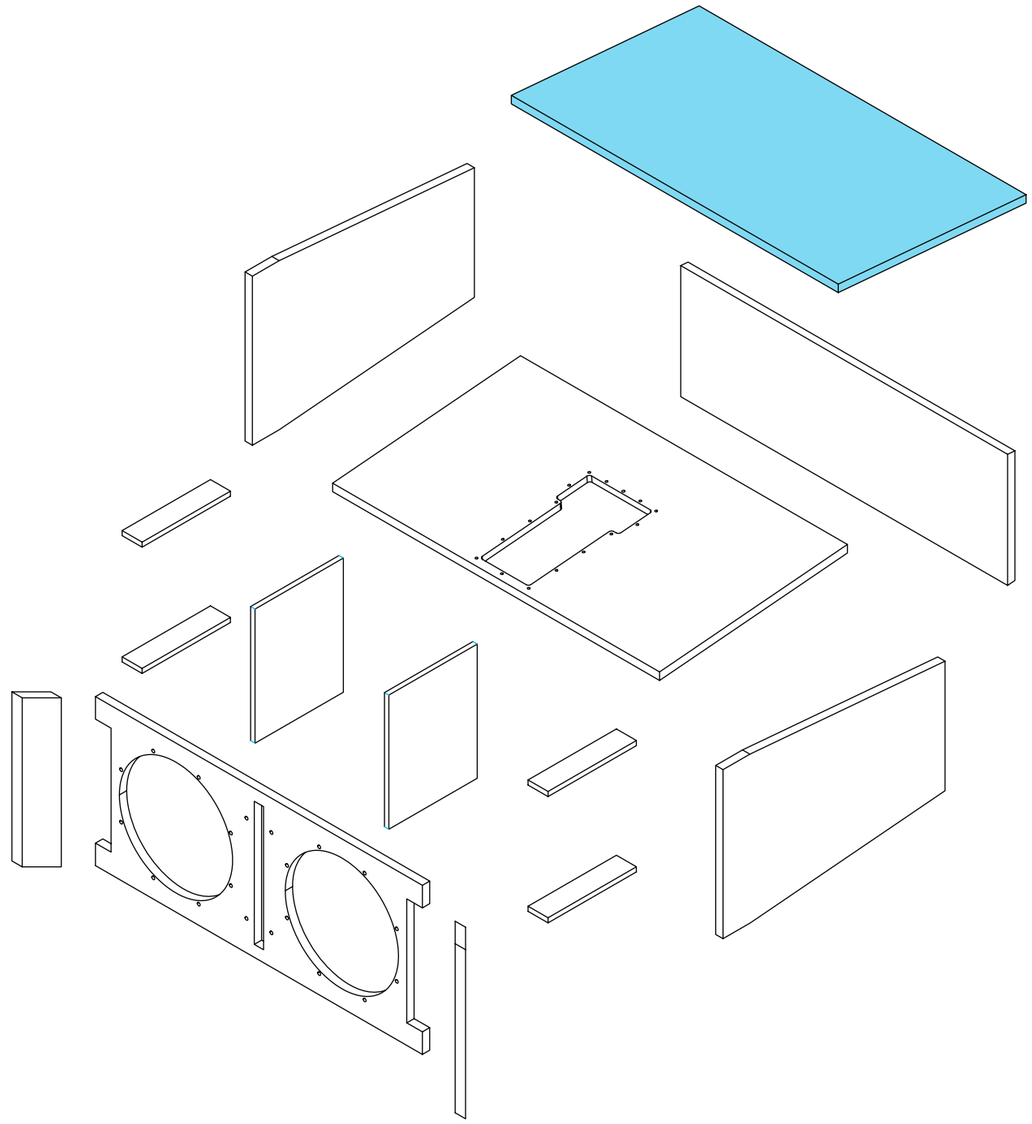

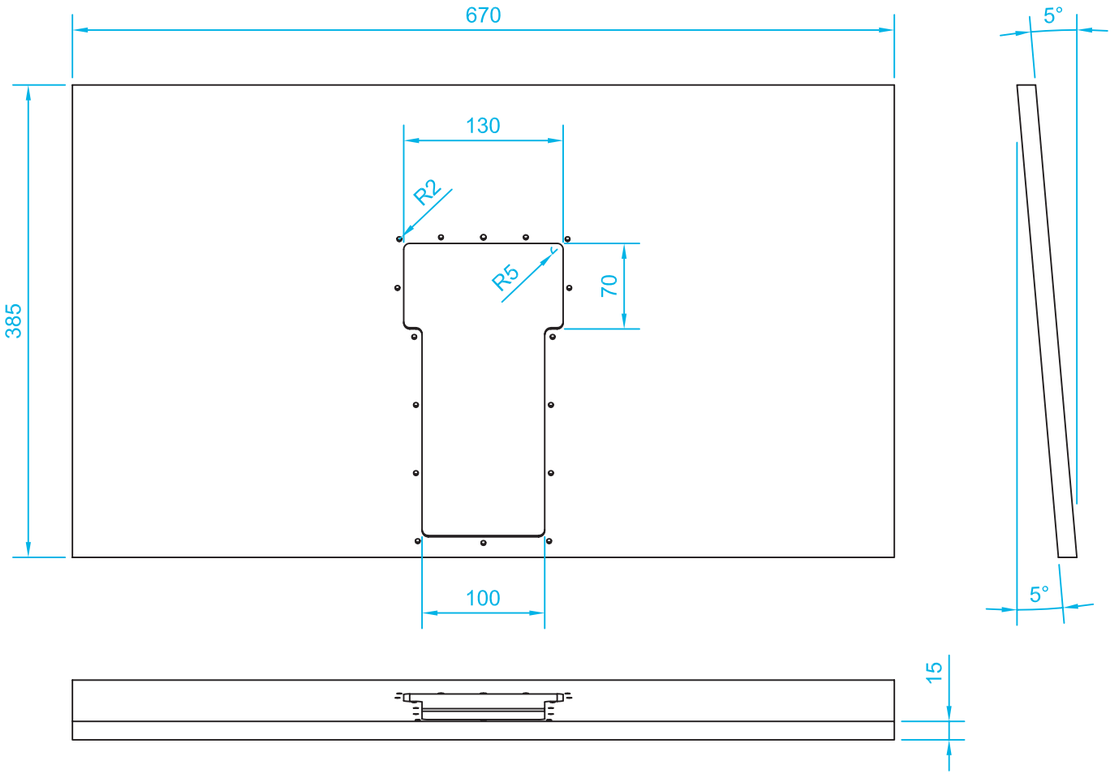
670
385
130
R2
R5
70
100
5°
5°
15

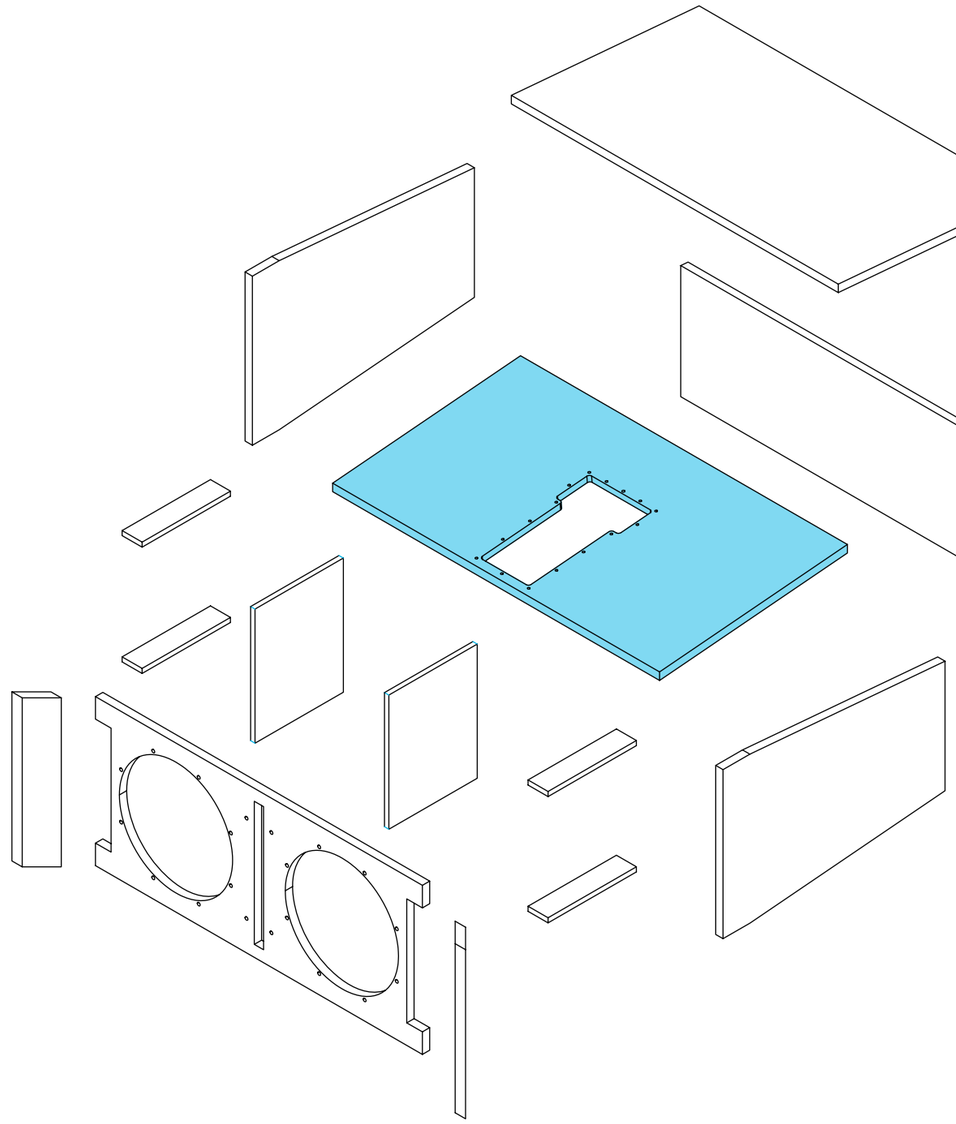

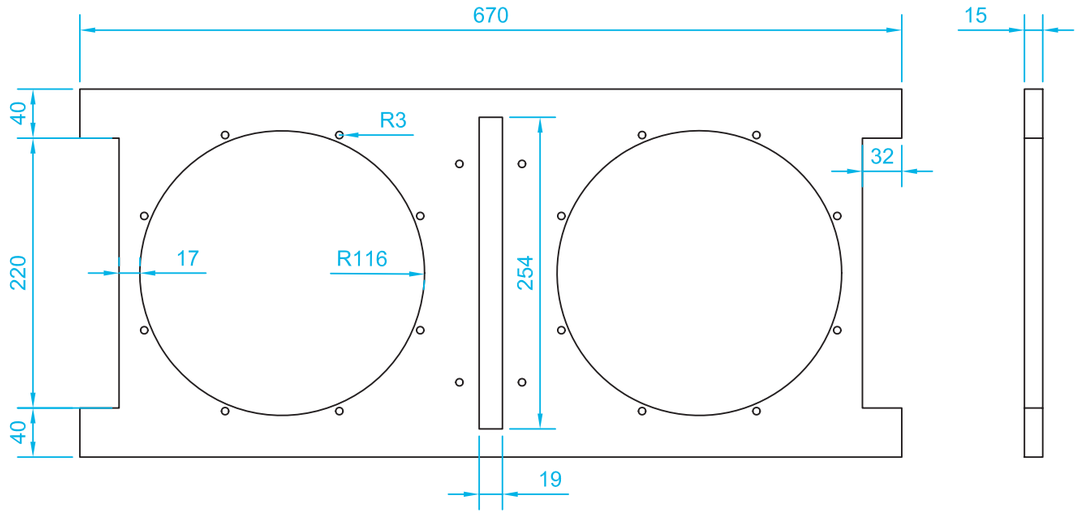
670
15
40
R3
32
220
17
R116
254
40
19

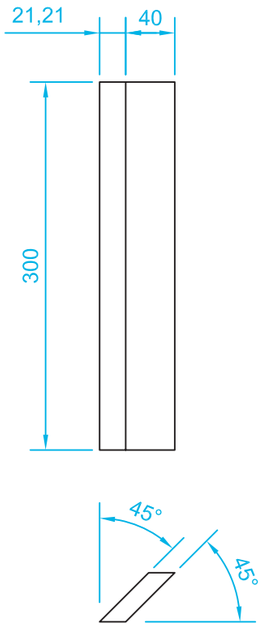
21,21
40
300
45°
45°

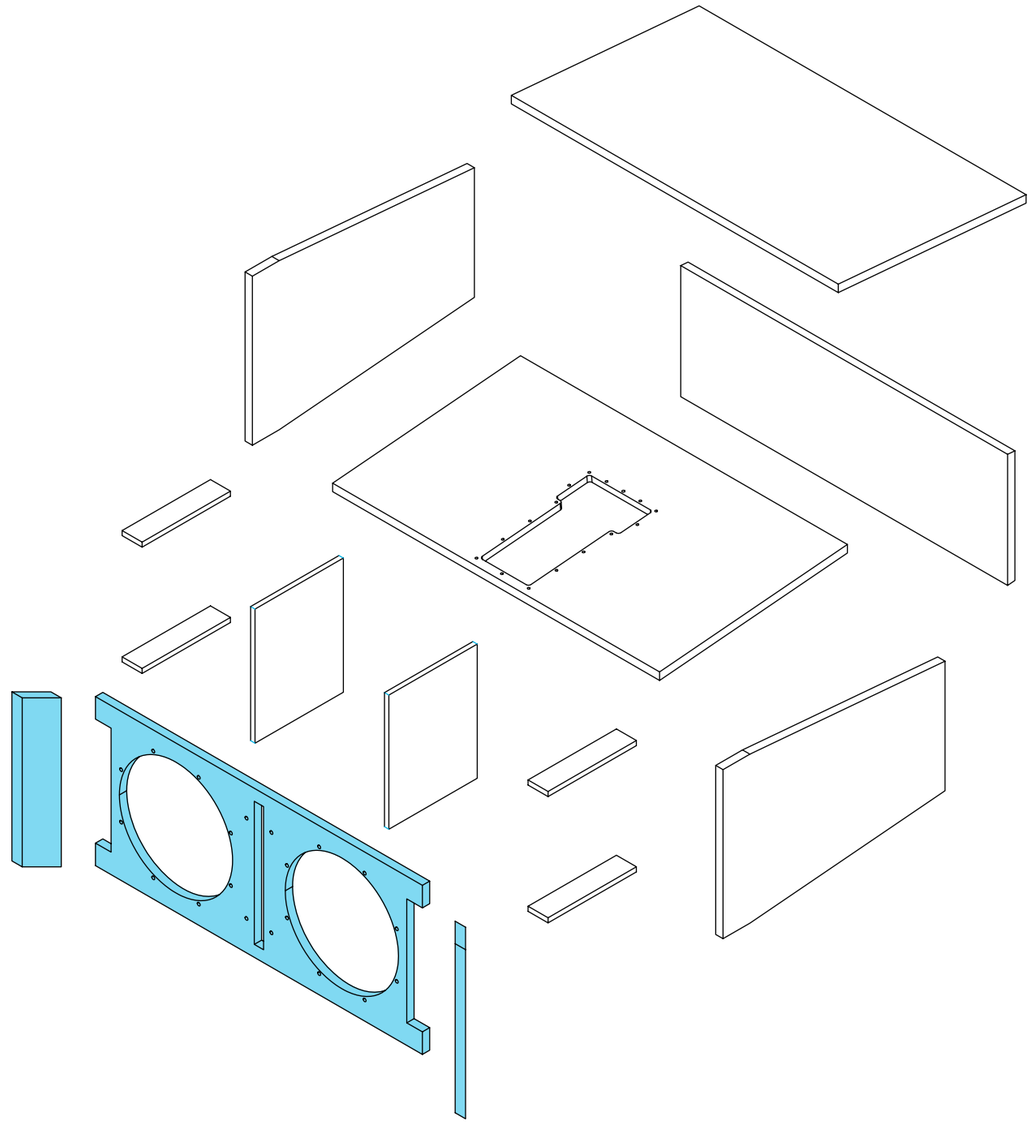

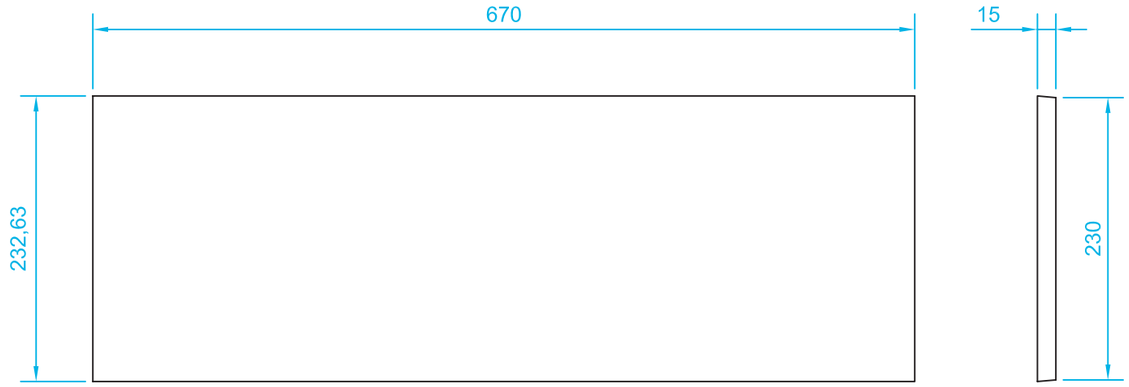
670
15
232,63
230

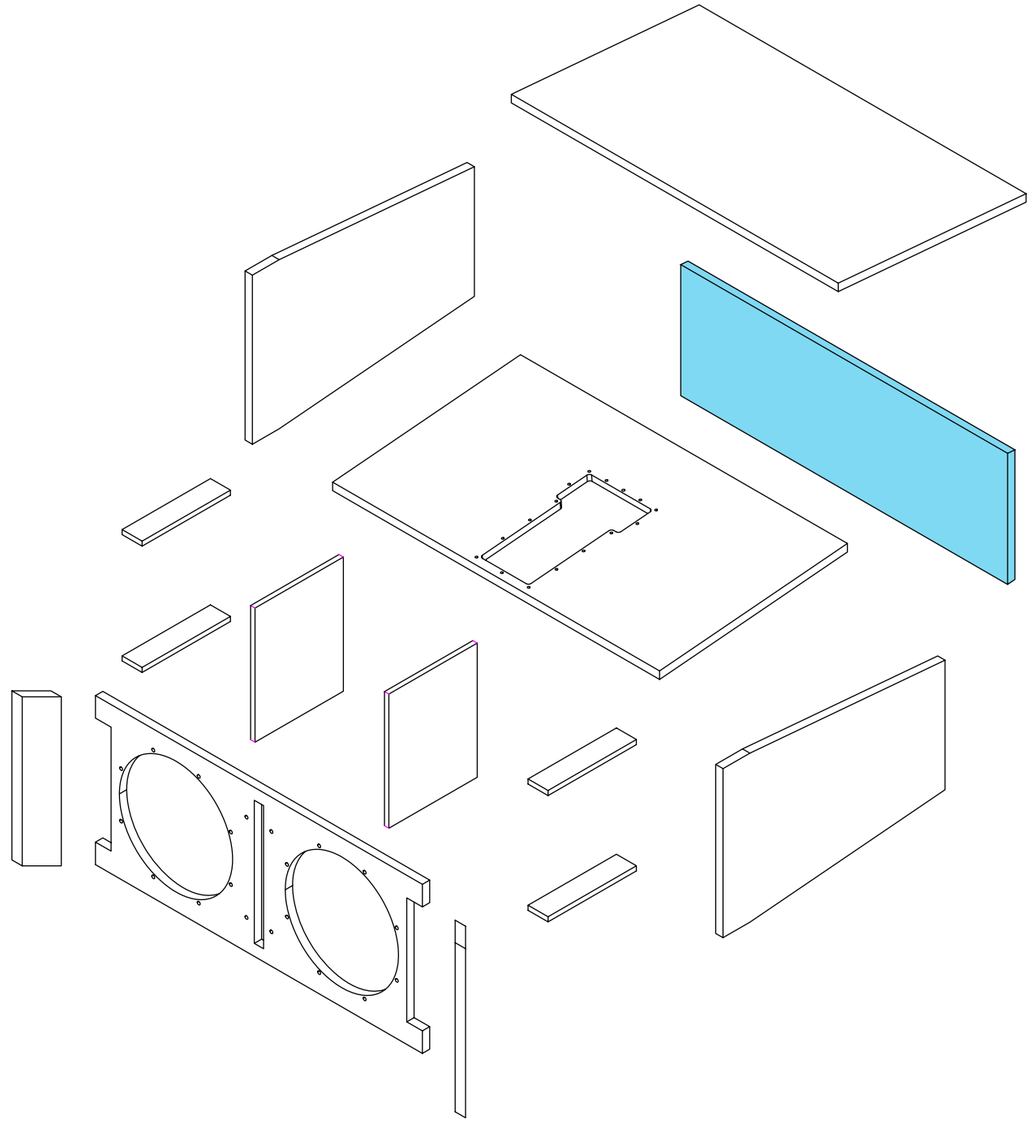

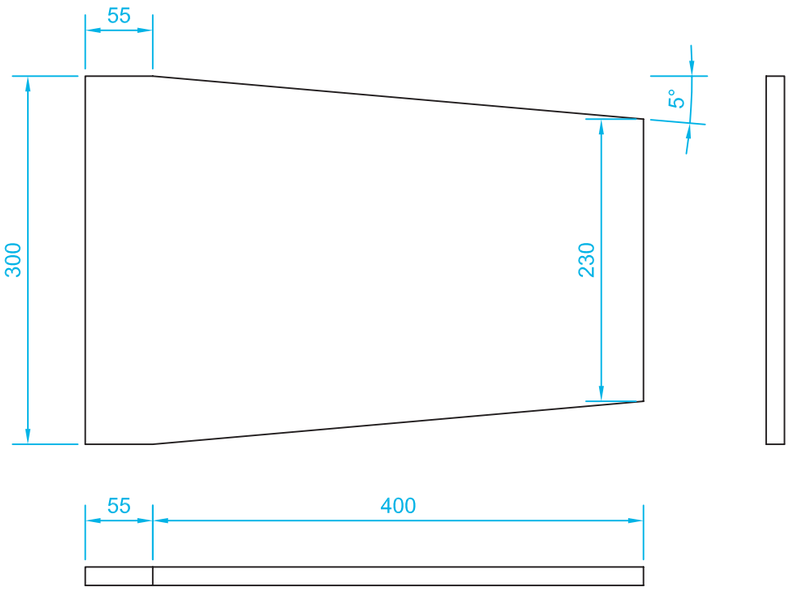
55
5°
300
230
55
400

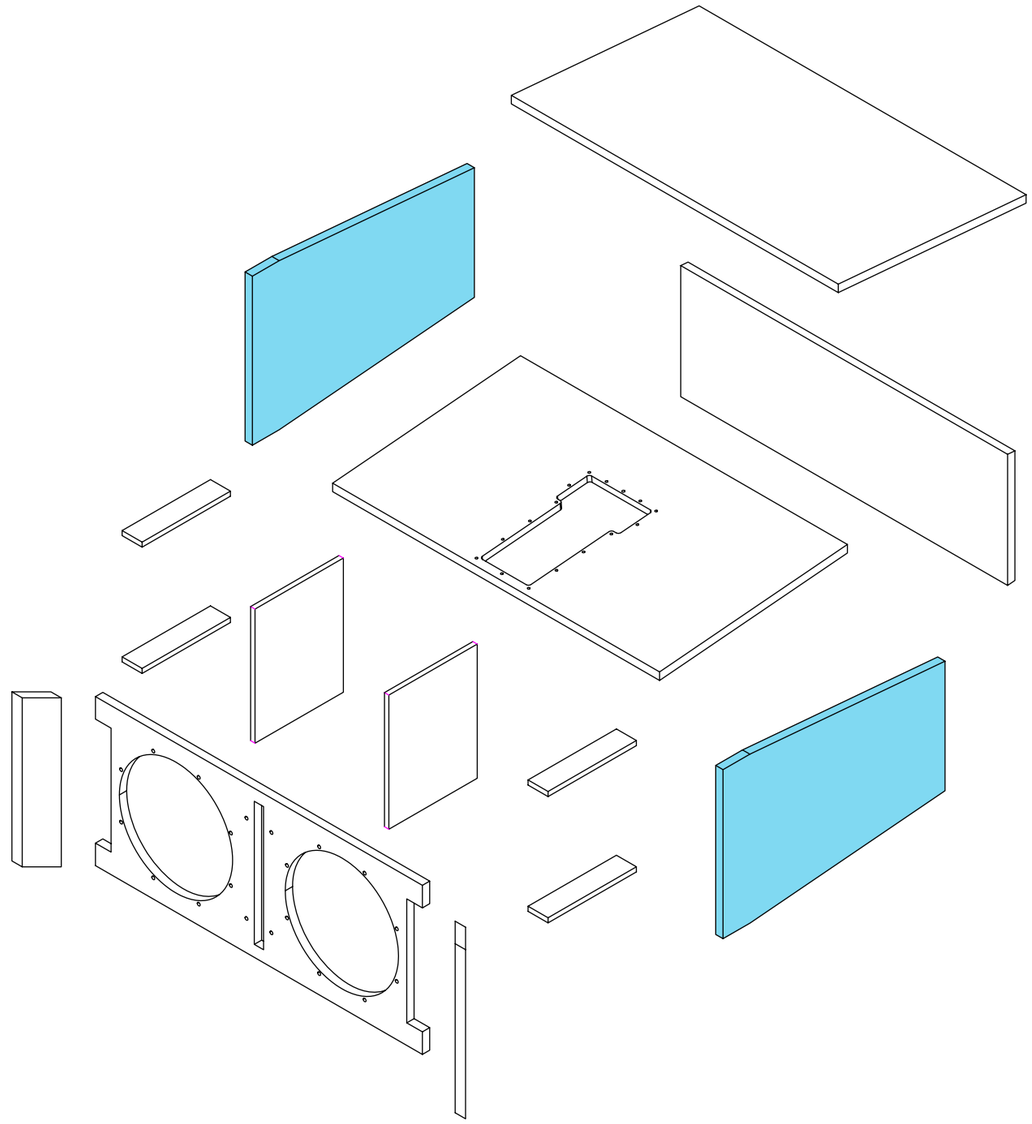

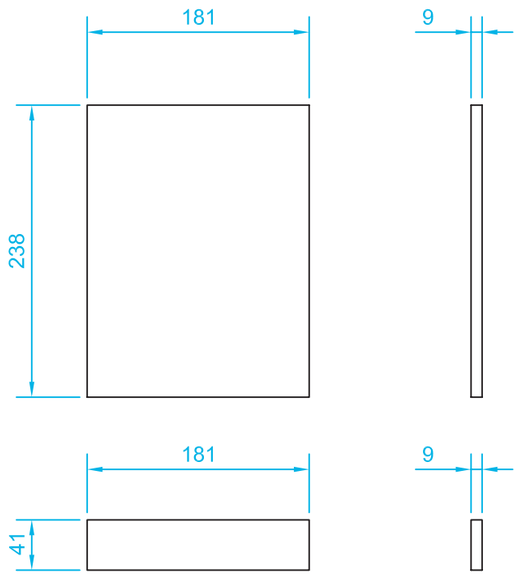
181
9
238
181
9
41

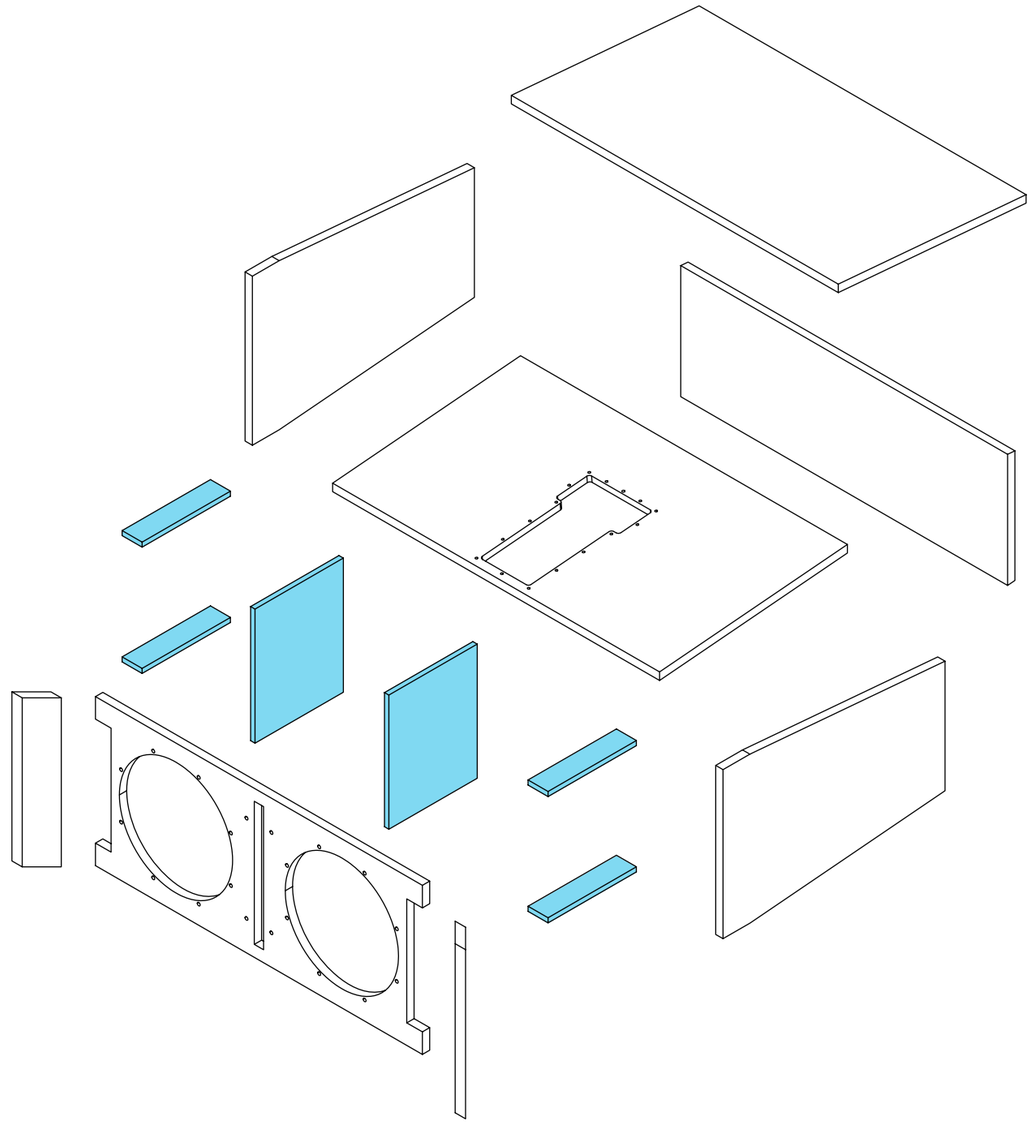

beyma

LET’S TALK !

www.beyma.com