

#### KEY FEATURES



- High power handling: 1.400 W program power
- Exclusive Malt Cross® Technology Cooling System
- Low power compression losses
- High sensitivity: 98 dB (1W / 1m)
- FEA optimized magnetic circuit
- Designed with MMSS technology
- Optimized non-linear behavior

- Waterproof cone treatment on both sides of the cone
- 3" DUO double layer in/out copper voice coil
- Aluminum demodulating ring
- Extended controlled displacement:  $X_{max} \pm 9,8$  mm
- 40 mm peak-to-peak excursion before damage
- Optimized for low frequency and mid-bass applications



#### TECHNICAL SPECIFICATIONS

Nominal diameter	380 mm	15 in
Rated impedance		8 $\Omega$
Minimum impedance		7,6 $\Omega$
Power capacity*		700 W <sub>AES</sub>
Program power		1.400 W
Sensitivity	98 dB	1W / 1m @ Z <sub>N</sub>
Frequency range		45 - 4.000 Hz
Voice coil diameter	76,2 mm	3 in
Bl factor		20,6 N/A
Moving mass		0,106 kg
Voice coil length		23 mm
Air gap height		8 mm
X <sub>damage</sub> (peak to peak)		40 mm

#### THIELE-SMALL PARAMETERS\*\*


Resonant frequency, f <sub>s</sub>	41 Hz
D.C. Voice coil resistance, R <sub>e</sub>	5,9 $\Omega$
Mechanical Quality Factor, Q <sub>ms</sub>	4,8
Electrical Quality Factor, Q <sub>es</sub>	0,38
Total Quality Factor, Q <sub>ts</sub>	0,35
Equivalent Air Volume to C <sub>ms</sub> , V <sub>as</sub>	153 l
Mechanical Compliance, C <sub>ms</sub>	140 $\mu$ m / N
Mechanical Resistance, R <sub>ms</sub>	5,7 kg / s
Efficiency, $\eta_0$	2,7 %
Effective Surface Area, S <sub>d</sub>	0,088 m <sup>2</sup>
Maximum Displacement, X <sub>max</sub> ***	9,8 mm
Displacement Volume, V <sub>d</sub>	880 cm <sup>3</sup>
Voice Coil Inductance, L <sub>e</sub> @ 1 kHz	1 mH

Notes:

\* The power capacity is determined according to AES2-1984 (r2003) standard. Program power is defined as the transducer's ability to handle normal music program material.

\*\* T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

\*\*\* The X<sub>max</sub> is calculated as (L<sub>vc</sub> - H<sub>ag</sub>)/2 + (H<sub>ag</sub>/3,5), where L<sub>vc</sub> is the voice coil length and H<sub>ag</sub> is the air gap height.

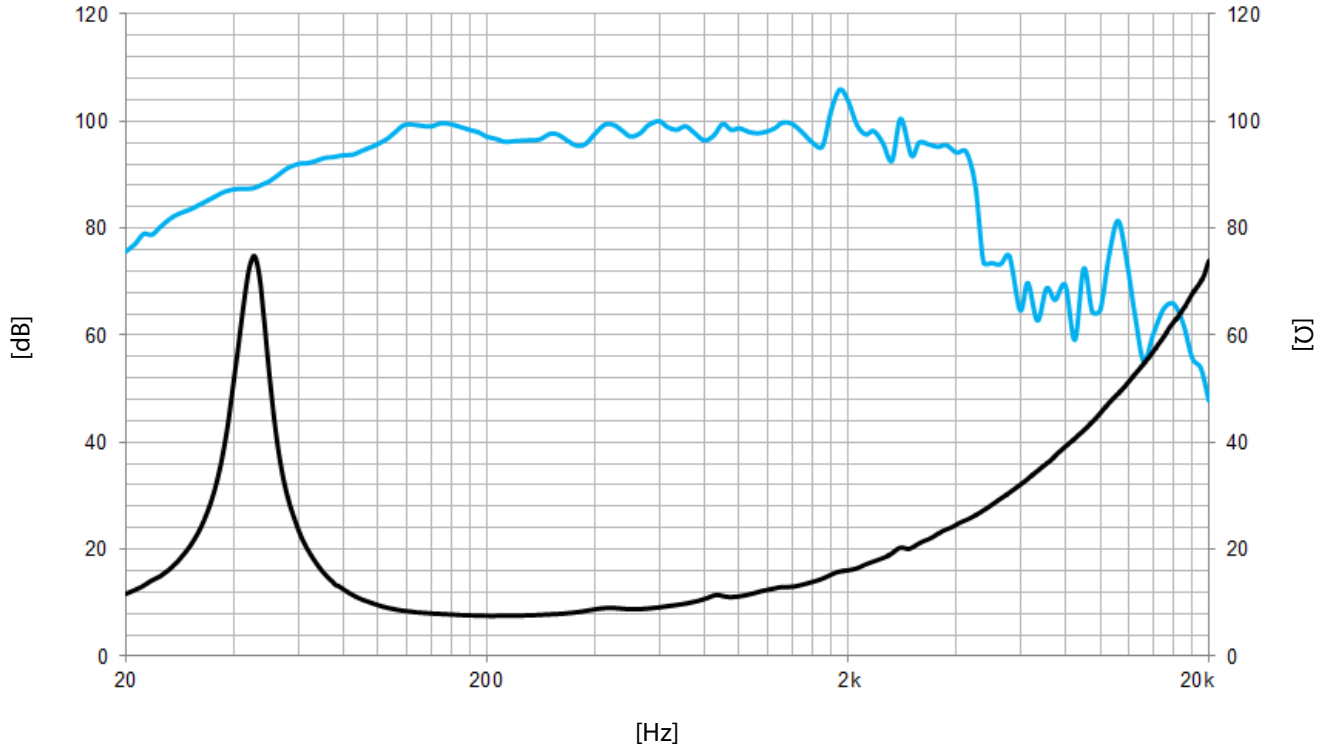

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

### MOUNTING INFORMATION

Overall diameter	388 mm	15,27 in
Bolt circle diameter	370 mm	14,56 in
Baffle cutout diameter:		
- Front mount	349,5 mm	13,76 in
Depth	175 mm	6,89 in
Net weight	7,5 kg	16,5 lb
Shipping weight	8,5kg	18,7 lb

### DIMENSION DRAWING

